




Measures Technology Values Innovation



VRLA Rechargeable Battery

SHR7-12 (SHR7-12FR)

FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for high rate usage
- Its design life is 3~5 years in floating application at 77°F/25°C
- Absorbent Glass Mat technology for efficient gas recombination
- The power density at 5 min~15min discharging rate is 30% higher than BP series

APPLICATION

- UPS
- Emergency Lights
- Toy-Cars
- Fishing Lights
- Power Packs

SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	15 Min Rate (27W, 1.60V/Cell)	3.5 Ah
Approx. Weight	1840g(4.06lbs.)	
Terminals	T2 (Faston Tab 250) T1 is optional	
Max. Discharge Current	90 A (5 sec.)	
Max. Charge Current	1.80 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤ 20mΩ (Fully Charged)	




CONTAINER MATERIAL


- SHR7-12:
ABS: UL 94-HB (Dark gray color)
- SHR7-12FR:
ABS: UL 94-V0 (Light gray color)

 ISO 9001	 ISO14001
 MH19884 UL	 C4M20310-2474-E-16 CE
• IEC61056	• JIS C 8702
• GB/T 19639	


OUTER DIMENSIONS mm(inch)	Length (L)	Width (W)	Container Height (H)	Total Height (TH)
	90±1.5(3.54±0.06)	70±1.5(2.76±0.06)	102±1.5(4.02±0.06)	106±2.0(4.17±0.08)

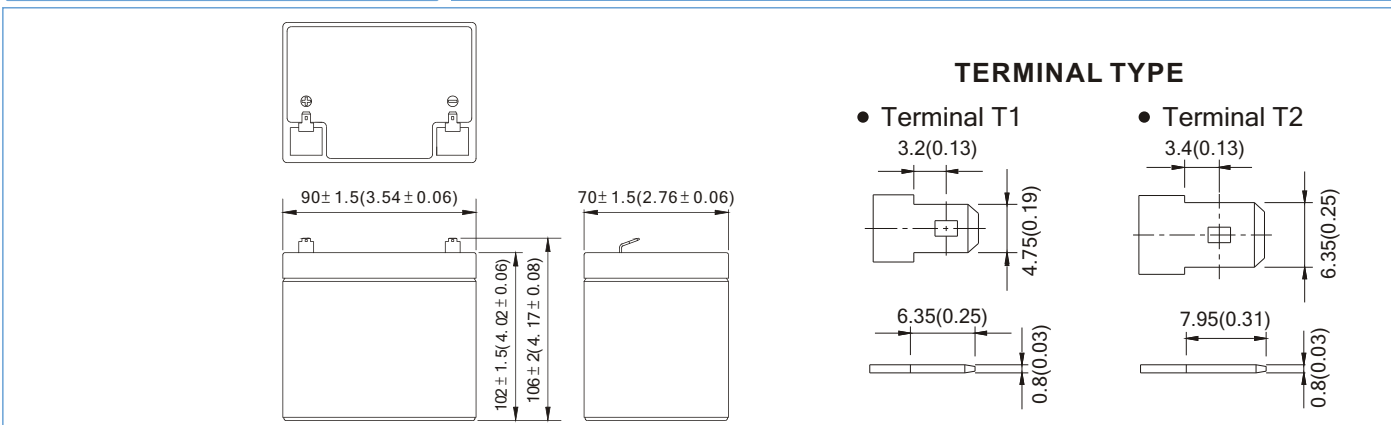

SHR7-12 (SHR7-12FR) discharge characteristics (25°C/77°F)

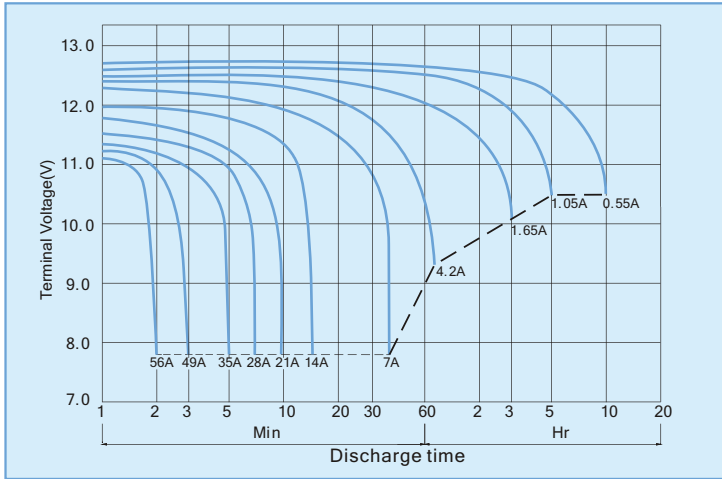


Battery Charging Characteristics

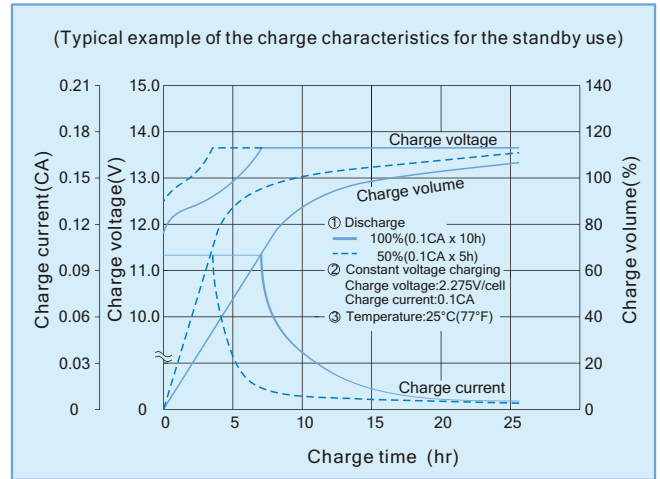

Charging Procedure

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (A)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	1.8	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	1.8	16	10	

Effect Of Temperature On Long Term Float Life

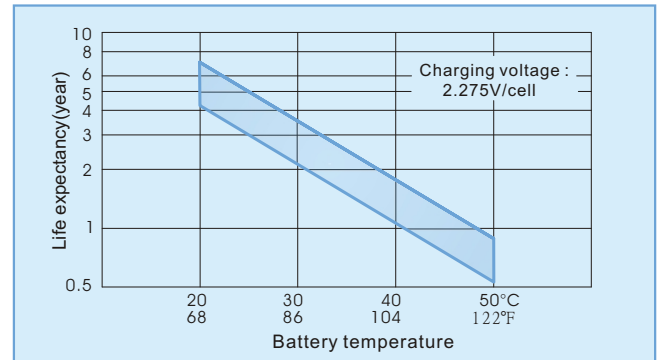

Constant power discharge characteristics at 25 °C/77 °F Unit: W

F.V. (V/cell) \ Discharge Time	2 Min	3 Min	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	484	408	307	196	153	119	88.4	68.7	58.3	51.4	27.5
1.75V	519	438	330	208	157	122	90.4	70.6	59.9	52.1	27.9
1.70V	545	459	343	212	159	124	91.3	71.4	60.4	52.4	28.1
1.67V	557	473	355	217	161	125	92.1	72.2	60.9	52.6	28.3
1.60V	568	486	368	221	162	126	92.9	73.0	61.3	52.8	28.5
1.50V	579	496	372	224	163	127	93.7	73.8	62.0	53.0	28.7

Constant current discharge characteristics at 25 °C/77 °F Unit: A

F.V. (V/cell) \ Discharge Time	2 Min	3 Min	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	44.5	37.4	27.6	17.1	13.2	10.17	7.50	5.83	4.91	4.31	2.29
1.75V	47.9	40.4	29.8	18.2	13.5	10.46	7.71	6.00	5.05	4.39	2.33
1.70V	50.5	42.4	31.0	18.7	13.7	10.62	7.78	6.07	5.09	4.41	2.34
1.67V	51.6	43.7	32.2	19.2	13.9	10.74	7.86	6.15	5.14	4.43	2.36
1.60V	52.7	44.9	33.4	19.5	14.1	10.85	7.93	6.22	5.18	4.45	2.38
1.50V	53.8	45.9	33.9	19.8	14.3	10.94	8.03	6.30	5.25	4.48	2.40

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.

Trial A/1 REV. Jun. 2010

USA:
B&B BATTERY(USA) INC.
6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.
TEL:1-323-278-1900.1-800-278-8599
FAX:1-323-278-1268
E-Mail:sales@bb-battery.com

CHINA FACTORY:
B.B. BATTERY CO., LTD.
CHENG DONG TRIAL AREA,HUANG GANG,
RAOPING, GUANG DONG,CHINA,515700
TEL:86-768-7601001-2
FAX:86-768-7601469
E-Mail:maggy@bb-battery.com

EUROPE:
B&B BATTERY(EUROPE) B.V.
Haaksbergweg 33, 1101 BP
Amsterdam, The Netherlands
TEL: +852-91282711
MOBILE: +852-91282711
E-Mail: dliu@bb-battery.com

HONG KONG:
NATIONAL TRADING LTD.
TEL:852-2301-3800
FAX:852-2739-1182
E-Mail:bbhk@hkstar.com

JAPAN:
B&B BATTERY(JAPAN) CO., LTD.
1375-11 NARAHARA-MACHI,HACHIOJI,
TOKYO 193-0803,JAPAN.
TEL:81-426-25-6375
FAX:81-426-25-6375
E-Mail:miyata@bb-battery.com

TAIWAN:
B.B. BATTERY(TAIWAN) CO., LTD.
TEL:886-6-502-5150
FAX:886-6-589-8087
E-Mail:maggy@bb-battery.com